



NA4

單點式稱重傳感器 SINGLE POINT LOAD CELL

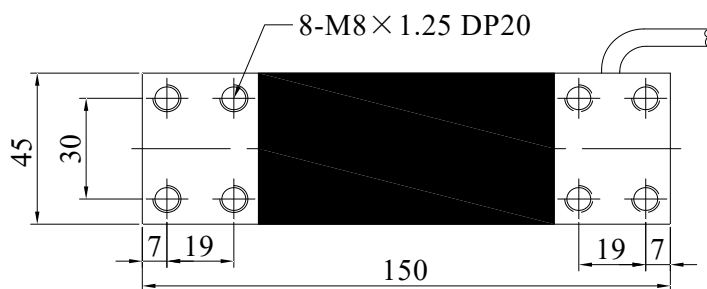

俯視(Top View)

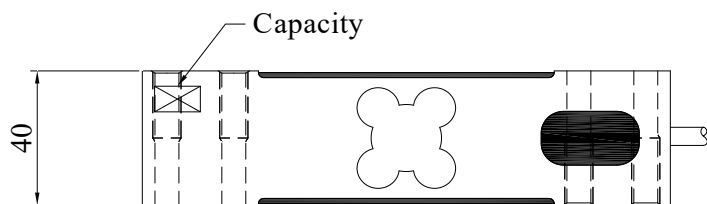

主視(Front View)

用途特點：計價秤、計數秤

Usage & Features: Pricing Scale、Counting Scale

技術參數 Specification

額定負荷Rated Capacities	kg	60~800				100~800
額定輸出Rated Output	mV/V	2.0 ±10%				
零點平衡Zero Balance	mV/V	±0.0200				
精度等級Accuracy class			OIML C3	OIML C4	OIML C5	OIML C6
最大檢定分度數Maximum number of load cell interval(nmax)			3000	4000	5000	6000
最小檢定分度值Minimum number of load cell interval(V min)			Emax/7000	Emax/12000	Emax/15000	Emax/18000
非線性Non-linearity	%R.O.	0.02	0.017	0.0125	0.01	0.008
滯後Hysteresis	%R.O.	0.02	0.017	0.0125	0.01	0.008
重複性Repeatability	%R.O.	0.02	0.017	0.0125	0.01	0.008
蠕變mins Creep	%R.O.	0.02	0.017	0.0125	0.01	0.008
回零mins Return	%R.O.	0.02	0.017	0.0125	0.01	0.008
安全過載率Safe Overload	%R.O.	150	150	150	150	150
極限過載率Ultimate Overload	%R.O.	200	200	200	200	200
輸出溫度影響Temperature Effect On Output	%R.O./10°C	0.02	0.015	0.0115	0.0095	0.008
零點溫度影響Temperature Effect On Zero	%R.O./10°C	0.03	0.02	0.0115	0.0095	0.008
輸入阻抗Input Impedance	Ω	410±15				
輸出阻抗Output Impedance	Ω	350±5				
絕緣阻抗Insulation Impedance	MΩ/(50VDC)	≥5000				
推薦工作電壓Recommended Excitation	VDC	5~12				
最大工作電壓Maximum Excitation	VDC	15				
工作溫度範圍Operating Temperature Range	°C	-20~60				
材質Construction		鋁合金 Aluminum Alloy				
防護等級Protection Class		IP66 / IP67				
電纜Cable		φ5×2m				
推薦台面尺寸Recommended Platform Size	mm	500×600				
接線方式Mode of Connection		紅：電源+，黑：電源-，綠：信號+，白：信號- Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)				

地址：廈門市海滄區新陽工業區新樂路19號 (Address:NO.19 XINLE ROAD XINYANG INDUSTRIAL ZONE HAICANG XIAMEN CHINA)

TEL:+86-592-5629881/882 FAX:+86-592-5629883 http://www.mavin.cn E-mail:mavin@mavin.cn