
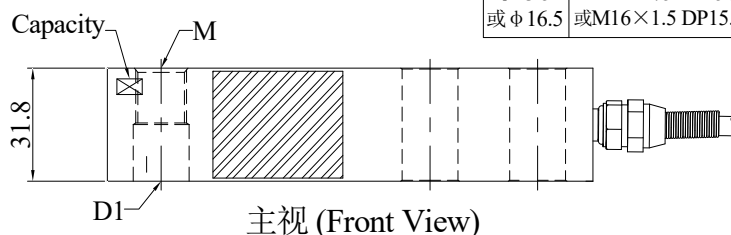


NB2 懸臂梁稱重傳感器

SHEAR BEAM LOAD CELL

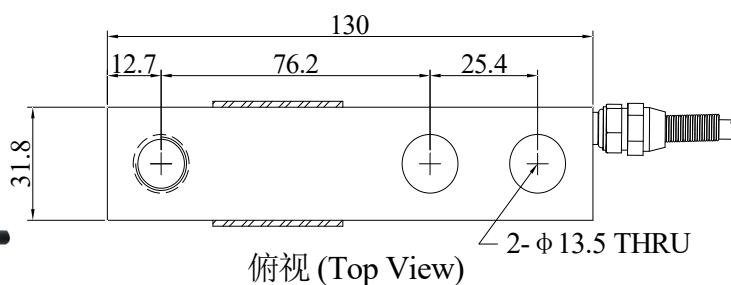

D1	M
φ 13.5 或 φ 16.5	M12×1.75 DP15.9 或 M16×1.5 DP15.9

用途特点：料斗秤、磅秤、工業稱重系統

Usage & Features: Hopper Scale、Floor Scale、Industrial Weighing System

技術參數 Specification

額定負荷Rated Capacities	0.1, 0.2, 0.3, 0.5, 1, 1.5, 2, 2.5, 3 (t)
額定輸出Rated Output	2.0 mV/V±0.15%; 3.0 mV/V±0.15%
零點平衡Zero Balance	±0.0200 mV/V
非線性Non-linearity	0.03 %R.O.
滯後Hysteresis	0.03 %R.O.
重復性Repeatability	0.03 %R.O.
蠕變(30分鍾)30mins Creep	0.03 %R.O.
回零(30分鍾)30mins Return	0.03 %R.O.
安全過載率Safe Overload	150 %R.O.
極限過載率Ultimate Overload	200 %R.O.
輸出溫度影響Temperature Effect On Output	0.002 %R.O./°C
零點溫度影響Temperature Effect On Zero	0.003 %R.O./°C
輸入阻抗Input Impedance	390±15 Ω
輸出阻抗Output Impedance	350±5 Ω
絕緣阻抗Insulation Impedance	≥5000 MΩ/(50VDC)
推薦工作電壓Recommended Excitation	5~12 VDC
最大工作電壓Maximum Excitation	15 VDC
工作溫度範圍Operating Temperature Range	-20~60 °C
材質Construction	合金鋼Steel Alloy; 不銹鋼Stainless Steel
防護等級Protection Class	IP67 / IP68
電纜Cable	φ5×3m
接線方式Mode of Connection	紅：電源+，黑：電源-，綠：信號+，白：信號- Red (EXC+), Black (EXC-), Green (SIG+), White (SIG-)

地址：廈門市海滄區新陽工業區新樂路19號 (Address:NO.19 XINLE ROAD XINYANG INDUSTRIAL ZONE HAICANG XIAMEN CHINA)

TEL:+86-592-5629881/882 FAX:+86-592-5629883 http://www.mavin.cn E-mail:mavin@mavin.cn